

Ellora[®] B




* image shown: 4 window unit, with 2 power and 2 Dual USB-A+C.


OVERVIEW


Ellora B has all of the same concealable power, USB, and data options as standard Ellora, but with some new features that elevate the unit's design. Ellora B has a one piece, seamless aluminum frame. Available with 4, 5 or 6 windows.

SPECIFICATIONS

* Images depict a 4 Window Ellora B with 4 power







CUT OUT DIMENSION

Unit Size	Length	Width
4 Window	7-7/8"	4-7/8"
5 Window	9-3/8"	4-7/8"
6 Window	10-7/8"	4-7/8"

Min Surface Depth 3/8"

Max Surface Depth 1 1/2"

POWER ENTRY OPTIONS

UL LISTED

Corded

UL RECOGNIZED

Interlink

& ETL LISTED

Hardwired 4-Trac interconnect

8-Trac interconnect

Interlink IQ 2.0

CODES

NEW YORK

The Corded Ellora B can be used in New York City as per the New York City Electrical Code.

CHICAGO


The Corded Ellora B can be used on Listed freestanding furnishings in Chicago. Limitations apply. The Hardwired Ellora B must be used on all other furnishings in Chicago

CONFIGURATIONS SIZE

Ellora B offers 4, 5 or 6 windows, as shown. Each window can hold a variety of power or data options.

INTEGRATED TECHNOLOGIES

The power simplexes must be grouped together and installed at the right end of this product. Technologies requiring power must immediately follow.

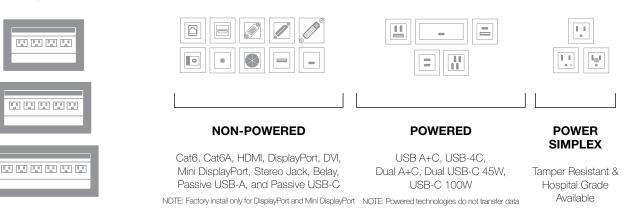

FINISHES


Ellora B is offered in 4 on-trend powder coated colors: Matte Black, Matte White, Matte Storm, and Matte Fog. The power and data options are molded plastic in the same colors. The inside faceplate is matte white, unless the unit is black, in which case the inside faceplate is also black. Custom options for finishes are also available.

POWDER COATED ALUMINUM



FINISH AREAS

Powder Coated





Powder Coated Inside Faceplate



PLASTIC SIMPLEXES,

Simplex, Window Frames, and End Cap